

### MEH8-SERIES

高速型旋转接头 支持多个同个通路传送

工作参数:

WORKING PARAMETERS

- 通道数: 8进8出
- 真空压力: -1.5KPA
- 材 质: 特种钢
- 最大正压: 25MPA
- 最高转速: 1000RPM
- 工作温度: -40°C~+125°C





安全





美观



可靠

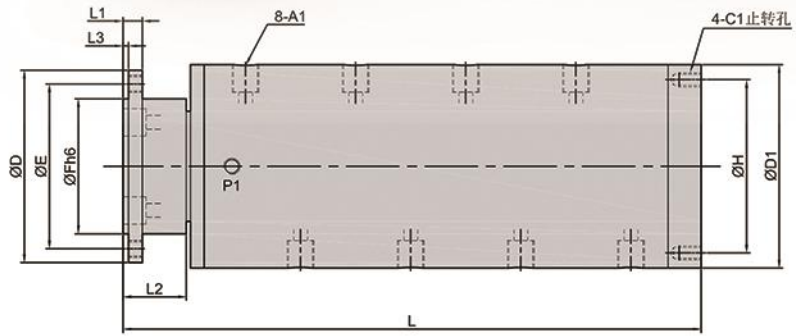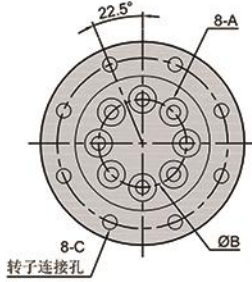

型号 Model	A	A1	P1	B mm	C mm	C1 mm	D mm	D1 mm	E mm	F mm	H mm	L mm	L1 mm	L2 mm	L3 mm
MEH818	Rc1/8	Rc1/8	Rc1/8	39	7.0	M6	79	79	68	57	69	165	12	30	4
MEH814	Rc1/4	Rc1/4	Rc1/8	42	7.0	M6	84	79	73	62	74	175	12	30	4
MEH838	Rc3/8	Rc3/8	Rc1/8	60	9.0	M6	114	84	102	87	74	185	14	32	4

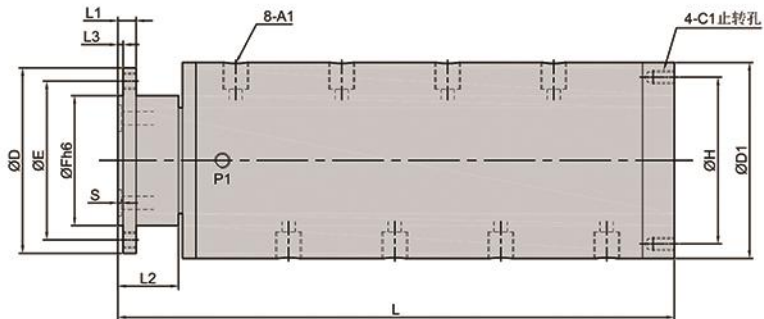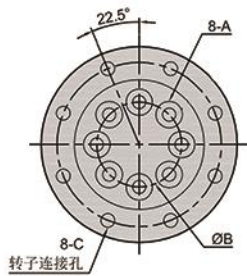

型号 Model	A1	A	P1	B mm	C mm	C1 mm	D mm	D1 mm	E mm	F mm	H mm	L mm	L1 mm	L2 mm	L3 mm	S mm
MEH818-07	Rc1/8	7*2	Rc1/8	29	7.0	M6	69	79	59	43	59	165	12	30	4	1.4
MEH814-09	Rc1/4	9*2	Rc1/8	34	7.0	M6	79	79	68	49	69	175	12	30	4	1.4
MEH838-010	Rc3/8	10*2	Rc1/8	38	9.0	M6	89	84	74	55	74	185	14	32	4	1.4