

# MFY 2-SERIES

## 2通路液压系列旋转接头 (2进2出)



### 产品特点:


#### PRODUCT CHARACTERISTICS

- 特殊密封设计, 密封性能好, 无泄露, 寿命长
- 双列高精度进口球轴承排列, 运行平稳
- 适应多种设备, 输送油 水等流体介质

### 工作参数:

#### WORKING PARAMETERS

- 液体通道数: 2进2出
- 最大正压: 35MPa
- 真空压力: -1.5KPa
- 最高转速: 300RPM
- 材 质: 特种钢/铝合金
- 工作温度: -40°C~+185°C

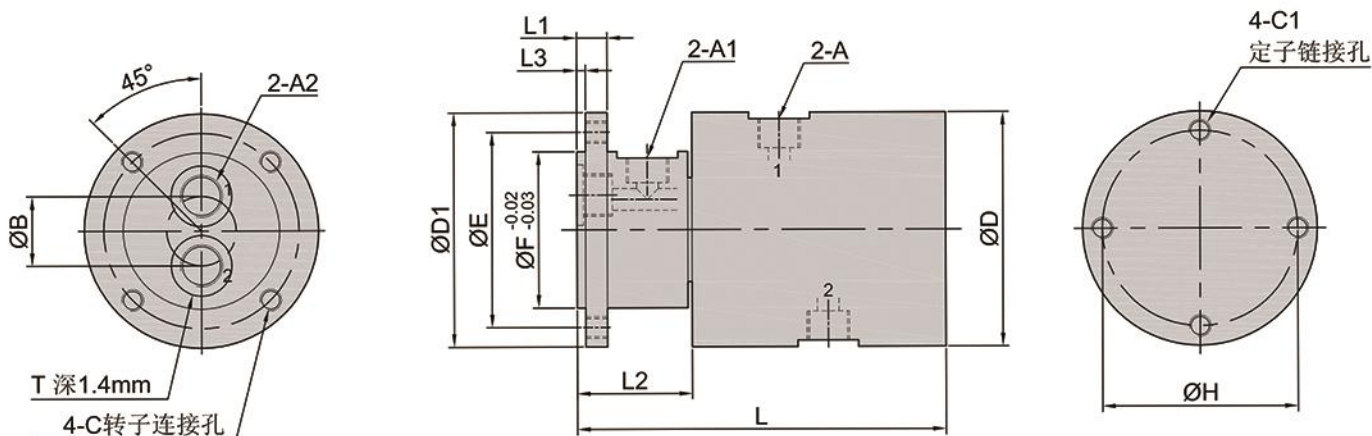

型号 Model	A	A1	A2	B mm	C mm	C1 mm	D mm	D1 mm	E mm	F mm	H mm	L mm	L1 mm	L2 mm	L3 mm	T mm
MFY218	PT1/8	PT1/8	PT1/8	21	M5	M5	64	64	55	45	55	125	10	31	4	18
MFY214	PT1/4	PT1/4	PT1/4	23	M6	M6	69	69	60	48	60	131	10	34	4	20
MFY238	PT3/8	PT3/8	PT3/8	27	M6	M6	79	79	70	59	70	144	10	41	4	25
MFY212	PT1/2	PT1/2	PT1/2	32	M6	M6	89	89	78	67	78	156	11	49	4	30
MFY234	PT3/4	PT3/4	PT3/4	40	M8	M8	108	108	94	80	94	189	14	54	4	35
MFY201	PT1	PT1	PT1	50	M8	M8	134	134	120	104	120	223	16	69	4	40