

MFY8-SERIES

8通路液压系列旋转接头 (8进8出)




产品特点: PRODUCT CHARACTERISTICS

- 特殊密封设计, 密封性能好, 无泄露, 寿命长
- 双列高精度进口球轴承排列, 运行平稳
- 适应多种设备, 输送油 水等流体介质

工作参数: WORKING PARAMETERS

- 流体通道数: 8进8出
- 最大正压: 35MPA
- 真空压力: -1.5KPA
- 最高转速: 120RPM
- 材 质: 特种钢/铝合金
- 工作温度: -40°C ~ +185°C

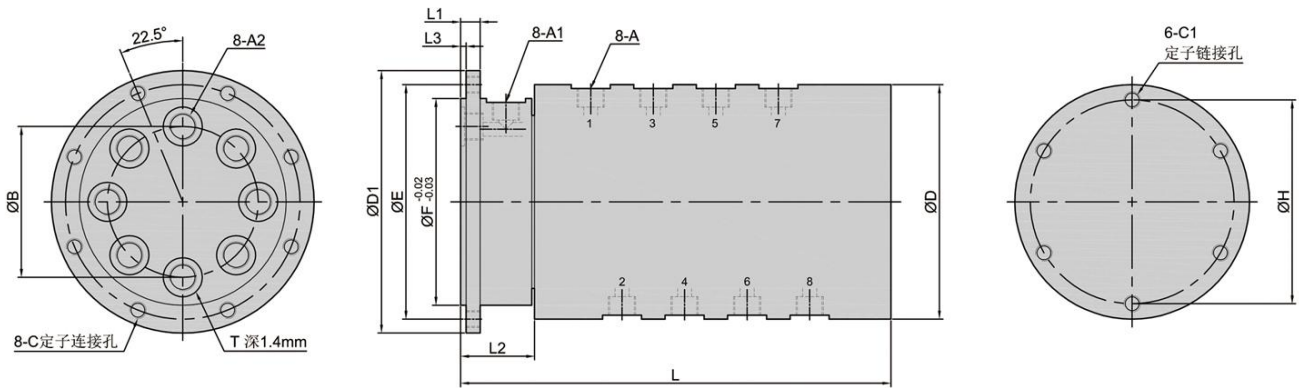

型号 Model	A	A1	A2	B mm	C mm	C1 mm	D mm	D1 mm	E mm	F mm	H mm	L mm	L1 mm	L2 mm	L3 mm	T mm
MFY818	PT1/8	PT1/8	PT1/8	54	M6	M6	74	94	84	74	64	233	10	31	4	18
MFY814	PT1/4	PT1/4	PT1/4	59	M6	M6	89	104	94	83	79	248	10	34	4	20
MFY838	PT3/8	PT3/8	PT3/8	75	M6	M6	109	124	114	104	99	292	10	41	4	25
MFY812	PT1/2	PT1/2	PT1/2	79	M8	M8	124	144	132	115	112	330	11	49	4	30
MFY834	PT3/4	PT3/4	PT3/4	103	M10	M10	145	179	164	143	130	369	13	59	4	35
MFY801	PT1	PT1	PT1	122	M10	M10	182	214	196	177	164	419	15	69	4	40